
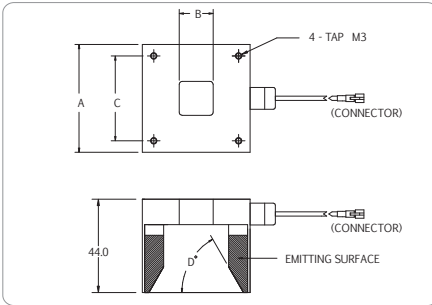


# Diffused Illumination

## DLS & DLW SERIES - Diffused square illumination

DLS & DLW series provide diffused even illumination over a surface. The even illumination prevents glaring for shining surface.

Application: character recognition on shining surface, lead inspection.

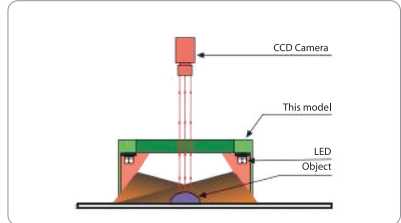

### Technical Specification:

- Color Red, Green, Blue and White
- 24V DC Input Power
- Continuous and Strobe Applications
- Compact Size
- Lighting Cable 500mm

### Customize Lighting:

- Customize Sizes, Mounting requirements
- Color and Voltage Available
- Consult Technical Sales for More Information

Model	Dimensions (MM)				Color	Voltage / Watt	Current
	A	B	C	D°			
DLS-60-050-1-X	50.8	16	40	60	● ● ○ ● ● ○	24V / 1.44W 24V / 1.44W	60mA 60mA
DLS-60-070-1-X	76.2	20	66	60	● ● ○ ● ● ○	24V / 2.16W 24V / 2.88W	90mA 120mA
DLS-60-100-1-X	101.6	20	91.5	60	● ● ○ ● ● ○	24V / 2.88W 24V / 4.32W	120mA 180mA
DLW-60-070-1-X	76.2	40	66	60	● ● ○ ● ● ○	24V / 2.16W 24V / 2.88W	90mA 120mA
DLW-60-100-1-X	101.6	66	91.5	60	● ● ○ ● ● ○	24V / 2.88W 24V / 4.32W	120mA 180mA
DLS-75-050-1-X	50.8	16	40	75	● ● ○ ● ● ○	24V / 1.44W 24V / 1.44W	60mA 60mA
DLS-75-070-1-X	76.2	20	66	75	● ● ○ ● ● ○	24V / 2.16W 24V / 2.88W	90mA 120mA
DLS-75-100-1-X	101.6	20	91.5	75	● ● ○ ● ● ○	24V / 2.88W 24V / 4.32W	120mA 180mA
DLW-75-070-1-X	76.2	40	66	75	● ● ○ ● ● ○	24V / 2.16W 24V / 2.88W	90mA 120mA
DLW-75-100-1-X	101.6	66	91.5	75	● ● ○ ● ● ○	24V / 2.88W 24V / 4.32W	120mA 180mA

Remark: 2 types of white are available- W: Cool White WW: Yellowish White