
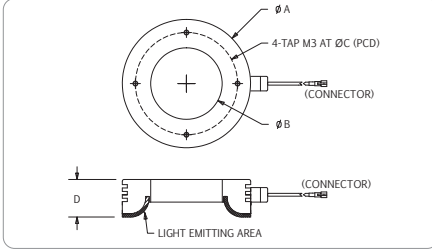


# Indirect Illumination

## HPD SERIES - Uniform ring light illumination

Power LED with molded diffuses to achieves high uniform area with higher flexibility.

Application: shining surface and food packaging.

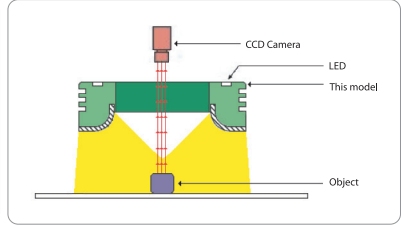

### Technical Specification:

- Color Red, Green, Blue and White
- 24V DC Input Power
- Continuous and Strobe Applications
- Compact Size
- Lighting Cable 500mm

### Customize Lighting:

- Customize Sizes, Mounting requirements
- Color and Voltage Available
- Consult Technical Sales for More Information

Model	Dimensions (MM)				Color	Voltage / Watt	Current
	$\phi A$	$\phi B$	$\phi C$	D			
HPD-00-070-1-X	75.5	42	60	22	<ul style="list-style-type: none"> <li>● ● ○ 24V / 1.80W 75mA</li> <li>● ● ○ 24V / 2.16W 90mA</li> </ul>		
HPD-00-110-2-X	114	68	90	22	<ul style="list-style-type: none"> <li>● ● ○ 24V / 3.96W 165mA</li> <li>● ● ○ 24V / 5.04W 210mA</li> </ul>		
HPD-00-170-1-X	176.6	111	150	29.6	<ul style="list-style-type: none"> <li>● ● ○ 24V / 19.20W 800mA</li> <li>● ● ○ 24V / 19.20W 800mA</li> </ul>		
HPD-00-240-1-X	245	158.5	200	38	<ul style="list-style-type: none"> <li>● ● ○ 24V / 28.80W 1200mA</li> <li>● ● ○ 24V / 28.80W 1200mA</li> </ul>		

Remarks : 1. HPD-00-110-1-X part number is changed to HPD-00-110-2-X

2. The current of HPD-00-070-1-X and HPD-00-110-2-X is changed.