
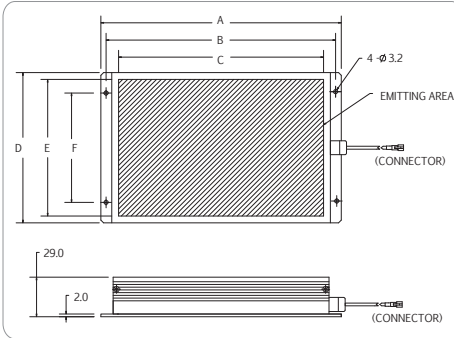
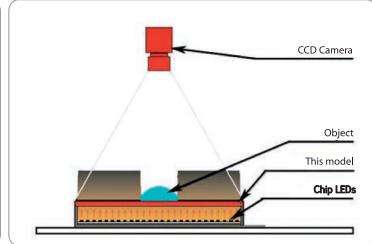


# Backlight Illumination

## BHLX2 SERIES- High intensity back light

BHLX2 series provide wide area of diffused back lighting.

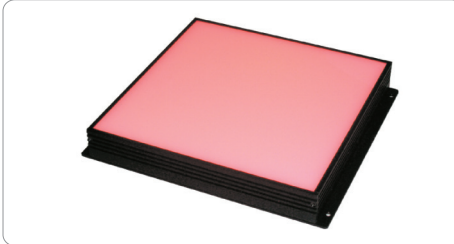

### Technical Specification:

- Color Red
- 24V DC Input Power
- Continuous and Strobe Applications
- Compact Size
- Lighting Cable 500mm

### Customize Lighting:

- Customize Sizes, Mounting requirements
- Color and Voltage Available
- Consult Technical Sales for More Information

Model	Dimensions [MM]						Color	Voltage / Watt	Current
	A	B	C	D	E	F			
BHLX2-00-120X180-X-X	206	198	180	128	120	100	●	24V / 19.44W	810mA
BHLX2-00-120X240-X-X	266	258	240	128	120	100	●	24V / 25.92W	1080mA
BHLX2-00-120X300-X-X	326	318	300	128	120	100	●	24V / 32.40W	1350mA
BHLX2-00-120X360-X-X	386	378	360	128	120	100	●	24V / 38.88W	1620mA
BHLX2-00-180X180-X-X	206	198	180	188	180	160	●	24V / 29.16W	1215mA
BHLX2-00-180X240-X-X	266	258	240	188	180	160	●	24V / 38.88W	1620mA
BHLX2-00-180X300-X-X	326	318	300	188	180	160	●	24V / 48.60W	2025mA
BHLX2-00-180X360-X-X	386	378	360	188	180	160	●	24V / 58.32W	2430mA
BHLX2-00-240X240-X-X	266	258	240	248	240	200	●	24V / 51.84W	2160mA
BHLX2-00-240X300-X-X	326	318	300	248	240	200	●	24V / 64.80W	2700mA
BHLX2-00-240X360-X-X	386	378	360	248	240	200	●	24V / 77.76W	3240mA
BHLX2-00-300X300-X-X	326	318	300	308	300	260	●	24V / 81.00W	3375mA
BHLX2-00-300X360-X-X	386	378	360	308	300	260	●	24V / 97.20W	4050mA
BHLX2-00-360X360-X-X	386	378	360	368	360	300	●	24V / 116.64W	4860mA

Remarks: 1. 2 types of white are available- W: Cool White WW: Yellowish White  
2. New dimension update for new generation.